

FI750 Series

In-Line Flow Indicator

Up to

- 180 lpm, 48 US gpm
- 420 bar, 6000 psi

Flow Indicators are designed for continuous monitoring or intermittent use commissioning and servicing hydraulic systems up to 420 bar, 6000 psi.

The large clear 63mm (2 1/2") diameter dial ensures that quick checks can be made to determine pump performance and setting of flow control valves. They can be used on mobile and industrial hydraulic circuits. Also lubrication and coolant systems using oil.

These direct acting flow indicators can be installed in hazardous areas or on applications where no power is available. The flow indicator design ensures good reliability and minimises the effects of contamination.

The flow indicator consists of a sharp edged orifice and tapered metering piston.

The piston movement is directly proportional to flow rate and the sharp edge orifice minimises the effects of viscosity. The piston is magnetically coupled to the rotary pointer assembly which registers on a clear 63mm (2 1/2") scale displayed in lpm and USgpm.

The FI750 flow indicators should not be installed in circuits where the flow is reversed.

See RFI series for reversible operation.



Milwaukee, WI 53235, USA

Tel: +1 (414) 769-6400
sales-us@webtec.com

St. Ives, Cambs. PE27 3LZ, UK

Tel: +44 (0) 1480 397 400
sales-uk@webtec.com

www.webtec.com

Features

- **FLOW:** 2 - 180 lpm, 0.5 - 48 US gpm
- **PRESSURE:** 420 bar, 6000 psi
- **ACCURACY** within 4% FSD
- **BUILT-IN** thermometer available
- **DIRECT** reading
- **DUAL** scale lpm/US gpm
- **HORIZONTAL** or vertical mounting
- **LARGE** clear dial
- **LOW** cost rugged design
- **PRESSURE** gauge port
- **WIDE** operating range



Hydraulic measurement and control

Specifications

Model Number with temperature	Model number without temperature	Calibrated flow range		Main ports	Top port	Max pressure
		LPM	US gpm			
FI750-16ABOT	FI750-16ABO	2 - 16	0.5 - 4	3/4" BSPP	1/4" BSPP	420 bar
FI750-30ABOT	FI750-30ABO	2 - 30	0.5 - 8	3/4" BSPP	1/4" BSPP	420 bar
FI750-60ABOT	FI750-60ABO	2 - 60	0.5 - 16	3/4" BSPP	1/4" BSPP	420 bar
FI750-120ABOT	FI750-120ABO	4 - 120	1 - 32	3/4" BSPP	1/4" BSPP	420 bar
FI750-180ABOT	FI750-180ABO	10 - 180	4 - 48	3/4" BSPP	1/4" BSPP	420 bar
FI750-16ANOT	FI750-16ANO	2 - 16	0.5 - 4	3/4" NPSF	1/4" NPTF	6000 psi
FI750-30ANOT	FI750-30ANO	2 - 30	0.5 - 8	3/4" NPSF	1/4" NPTF	6000 psi
FI750-60ANOT	FI750-60ANO	2 - 60	0.5 - 16	3/4" NPSF	1/4" NPTF	6000 psi
FI750-120ANOT	FI750-120ANO	4 - 120	1 - 32	3/4" NPSF	1/4" NPTF	6000 psi
FI750-180ANOT	FI750-180ANO	10 - 180	4 - 48	3/4" NPSF	1/4" NPTF	6000 psi
FI750-16ASOT	FI750-16ASO	2 - 16	0.5 - 4	1 - 1/16" - 12 UNF #12 SAE ORB	1/4" NPTF	6000 psi
FI750-30ASOT	FI750-30ASO	2 - 30	0.5 - 8	1 - 1/16" - 12 UNF #12 SAE ORB	1/4" NPTF	6000 psi
FI750-60ASOT	FI750-60ASO	2 - 60	0.5 - 16	1 - 1/16" - 12 UNF #12 SAE ORB	1/4" NPTF	6000 psi
FI750-120ASOT	FI750-120ASO	4 - 120	1 - 32	1 - 1/16" - 12 UNF #12 SAE ORB	1/4" NPTF	6000 psi
FI750-180ASOT	FI750-180ASO	10 - 180	4 - 48	1 - 1/16" - 12 UNF #12 SAE ORB	1/4" NPTF	6000 psi

Note - All NPTF threads are to ANSI B1.20.3 -1976 Class 1. As stated in the standard it is recommended that "sealing is accomplished by the means of a sealant applied to the thread". NPT fittings may also be used to connect to NPTF ports (also with a sealant applied to the thread)

Functional specification

Ambient temperature:	-10 to 50°C (14 to 122°F)
Fluid type:	Hydraulic oils
Fluid temperature:	20 to 80°C (65 - 176°F) continuous use. Intermittently (<10 minutes) up to 110°C (230°F)
Accuracy:	
Flow:	± 4% of full scale
Temperature:	± 2.5°C (±5°F)
Dimensions:	146 x 74 x 49mm (5.75" x 2.9" x 1.92")
Weight:	1.4 kg (3.1 lbs)

Construction material

Main block:	Aluminium 2011T3
Internal parts:	Mainly brass
Seals:	Viton

Operation

The flow indicator consists of a sharp edged orifice and tapered metering piston. The piston movement is directly proportional to the flow rate and the sharp edge orifice minimises the effects of viscosity. The piston is magnetically coupled to the rotary pointer assembly which registers on a clear 63 mm (2.5") scale displayed in lpm and USgpm. The FI750 flow indicators should not be installed in circuits where the flow is reversed.

See our RFI series for reverse flow capability.

Calibration


All units are calibrated with 28cSt oil as standard. Calibration certificates are available on request - this is a chargeable option. Other calibration on request - please consult sales office.

Installation

The unit can be installed in any position, horizontal, vertical or anywhere in between. The unit is designed to panel mount or pipe mount. When panel mounting ensure that

Performance

Typical pressure drop curves. Oil viscosity 25 centistokes. (1 bar = 14.5 psi, 10 lpm = 2.64 US gpm)

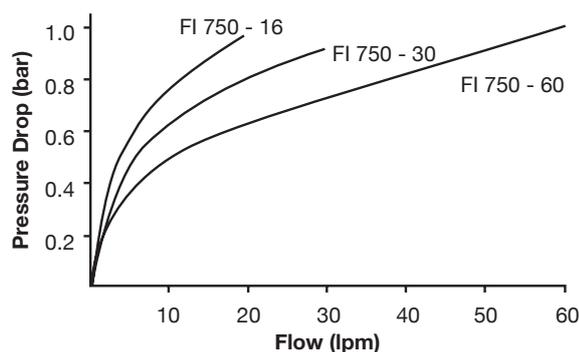


rear and bottom faces of the unit are at least 12 mm (1/2") from any ferrous material such as an iron panel or base. The piston contains a magnet that can be affected by close proximity of ferrous material. The front face can be mounted directly to ferrous panels. Two 9 mm (0.35") diameter holes are provided for this purpose.

The indicator can be connected into pressure or return lines, however, do not reverse flow; the flow indicator may be damaged and will act as a non return valve.

All hydraulic connections should be made by suitably trained personnel.

Accessories

Pressure gauge fitted directly into block or remotely connected by micro bore hose - See pressure gauge bulletin Flow switch, single pole reed switch - please contact sales office.

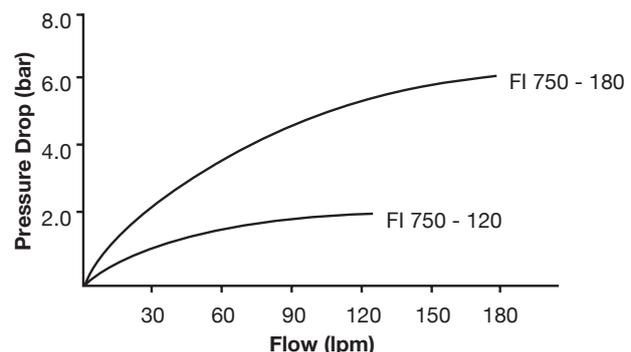

Innovative solutions tailored to your requirements:

- Hydraulics, power units and valves
- Pressure test units, high pressure hydraulics
- Production aids, machines

A wide range of excellent products:

- Proportional valves, emergency shut off valves, as well for hazardous areas
- Test couplings, check valves, pressure gauges
- Miniature-air/oil-coolers

Hydraulic components from well-known manufacturers,

- chosen by our high demands
- on quality and delivery reliability!

Repairs and maintenance

- on hydraulic parts and systems
- carried out by our specialists.

Your partner for
hydraulics and engineering
