


Bestellnummer Zubehör


Verwendbares Modell		AW10	AW20	AW30	AW40-04	AW40-06
Zubehör						
Befestigungswinkel ^{Anm. 1)}		AR10P-270AS	AW20P-270AS	AR30P-270AS	AR40P-270AS	AR40P-270AS
Panelmutter (Ersatzteil)		AR10P-260S	AR20P-260S	AR30P-260S	AR40P-260S	AR40P-260S
Manometer 1.0MPa	rund ^{Anm. 3)}	G27-10-R1	K8-10-40	K8-10-50	K4-10-50	K4-10-50
	quadratisch, eingelassen	—	GC3-10AS	GC3-10AS	GC3-10AS	GC3-10AS
^{Anm. 4)} Schwimmergesteuerter automatischer Kondensatablass	N.O.	—	—	AD38	AD48	AD48
	N.C.	AD17	AD27			

Anm. 1) Inkl. Panelmutter
 Anm. 2) Für 1MPa.
 Anm. 3) Inkl. O-Ring und 2 Befestigungsschrauben.
 Anm. 4) Min. Betriebsdruck: N.O.-Ausführung: 0.1MPa; N.C.-Ausführung: 0.1MPa (AD17/27) und 0.15MPa (AD37/47).

Abmessungen AW10, 20

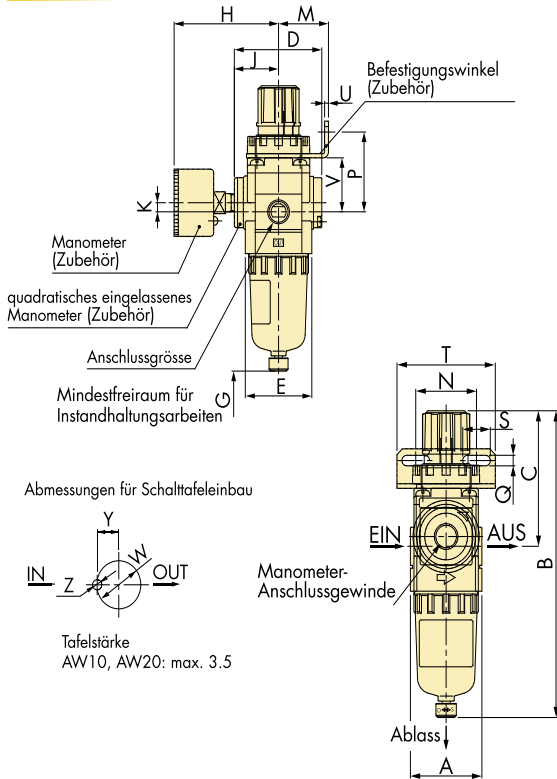

AW30, 40

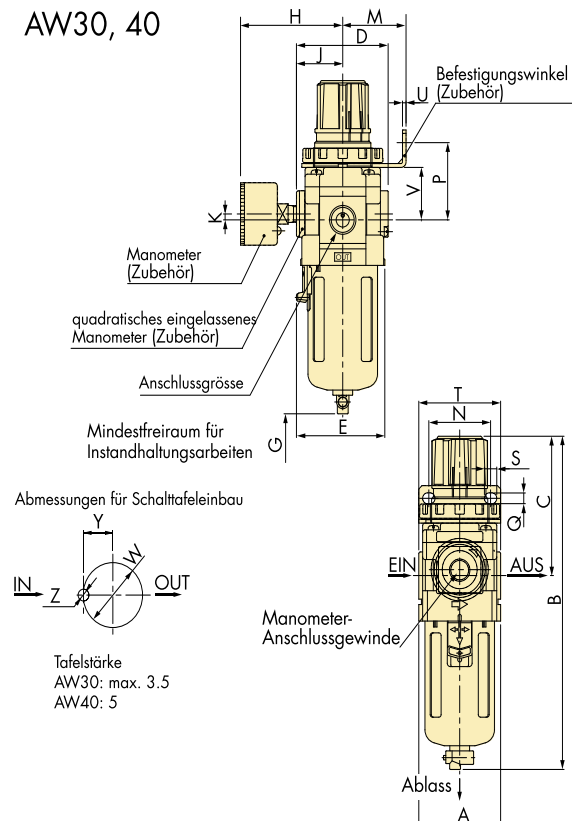

Modell	Anschlussgröße	Standardausführung					Zubehör																
		A	B	C	D	E	mit Manometer			mit Befestigungswinkel						Schalttafeleinbau				Zubehör			
AW10	M5	25	108	48	25	28	25	26	—	0	25	28	30	4.5	6.5	40	2	18	18.5	—	—	125	107
AW20	1/8, 1/4	40	160	73	52	40	40	63	27	5	30	34	44	5.4	15.4	55	2.3	30	28.5	14	6	177	160
AW30	1/4, 3/8	53	201	86	59	57	55	66	30.5	3.5	41	40	46	6.5	8	53	2.3	31	38.5	19	7	242	214
AW40	1/2	70	239	92	75	73	80	76	38.5	1.5	50	54	54	8.5	10.5	70	2.3	35.5	42.5	21	7	278	251
AW40-06	3/4	75	242	93	75	73	80	76	38.5	1.2	50	54	56	8.5	10.5	70	2.3	37	42.5	21	7	278	255

Bestellnummer Ersatzteile

Beschreibung	Material	Bestell-Nr.				
		AW10	AW20	AW30	AW40-04	AW40-06
Filterelement	Vliesstoff	AF10P-060S	AF20P-060S	AF30P-060S	AF40P-060S	AF40P-060S
Behälter O-Ring	NBR	CS1FP-260S	C2SFP-260S	C3SFP-260S	C4SFP-260S	C4SFP-260S
Behälter ^{Anm. 1)}	PC	C1SF	C2SF	C3SF ^{Anm. 2)}	C4SF ^{Anm. 2)}	C4SF ^{Anm. 2)}

Anm. 1) Inkl. Behälter O-Ring.
 Anm. 2) Inkl. Behälterschutz (Bandstahl)

